Hydraulic valves


Valves for manometers

# Pressure Gauge Protector (in-line) FM-SF straight

Mild Steel





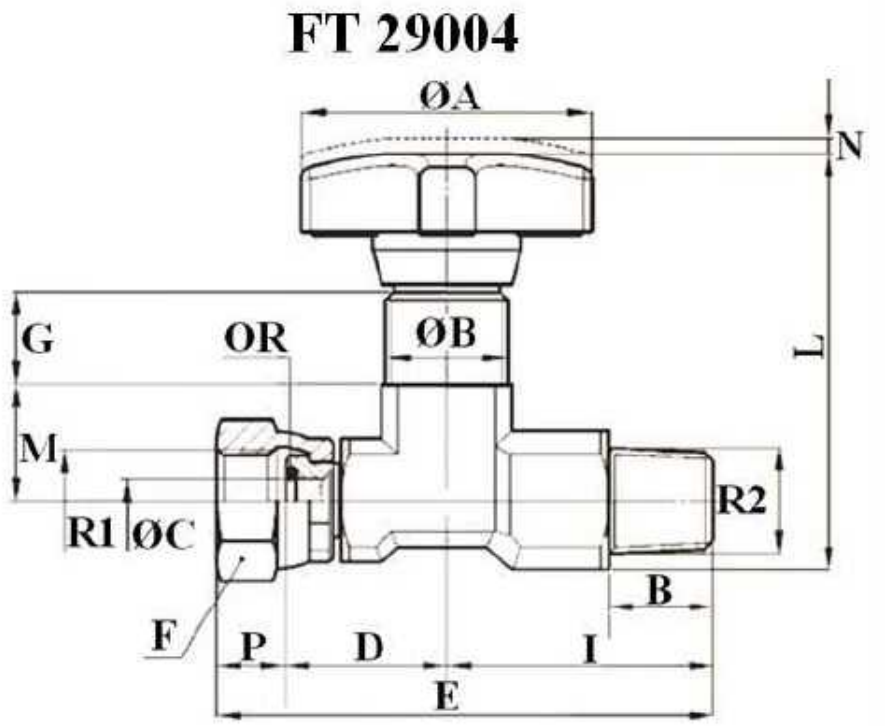


**Thread:** R1=BSP; R2=BSPT

**OR:** 2018

**Characteristics:** FT29004=STRAIGHT; FT29104=90º

**Image:** F=18; N=2

**Materials:** Body-9 S Mn Pb 23 - UNI 5105 - press forg.
Needle-35 S Mn Pb 23 - UNI 5105-burnished
OR-Nitrile
Antiextrusion ring-PTFE
Handwheel-Nylon 66

**Temperature:** from -20ºC to +100ºC

| Part nº | R1 | R2 | Max. Press. (bar) | L | ØA | ØB | ØC | B | D | E | G | I | M | P |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **FT29004** | 1/4'' BSP | 1/4'' BSPT | 350 | 53 | 34 | M15X1 | 5,6 | 13 | 20 | 61,5 | 12 | 33 | 15 | 8,5 |
| **FT29008** | 1/2'' BSP | 1/2'' BSPT | 350 | 82,5 | 40 | M20X1 | 6,5 | 16 | 32 | 83 | 12,5 | 40 | 19 | 11 |

*The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.*