

Compressed air treatment elements


Filters

Pressure reducer + lubricant + filter (3 bodies)





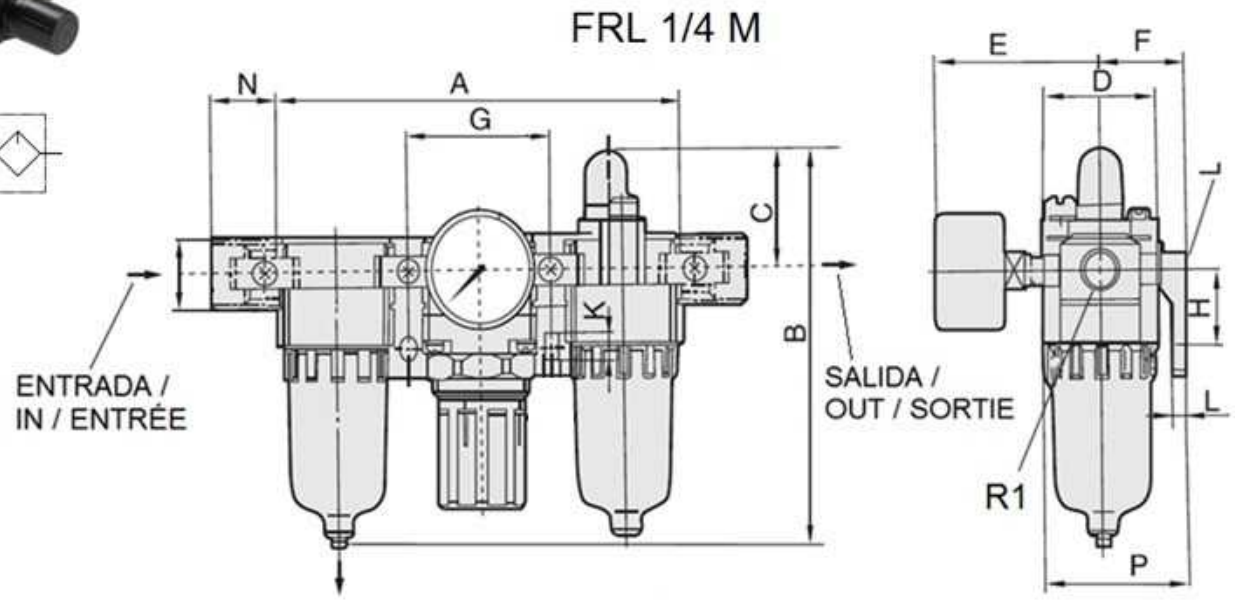

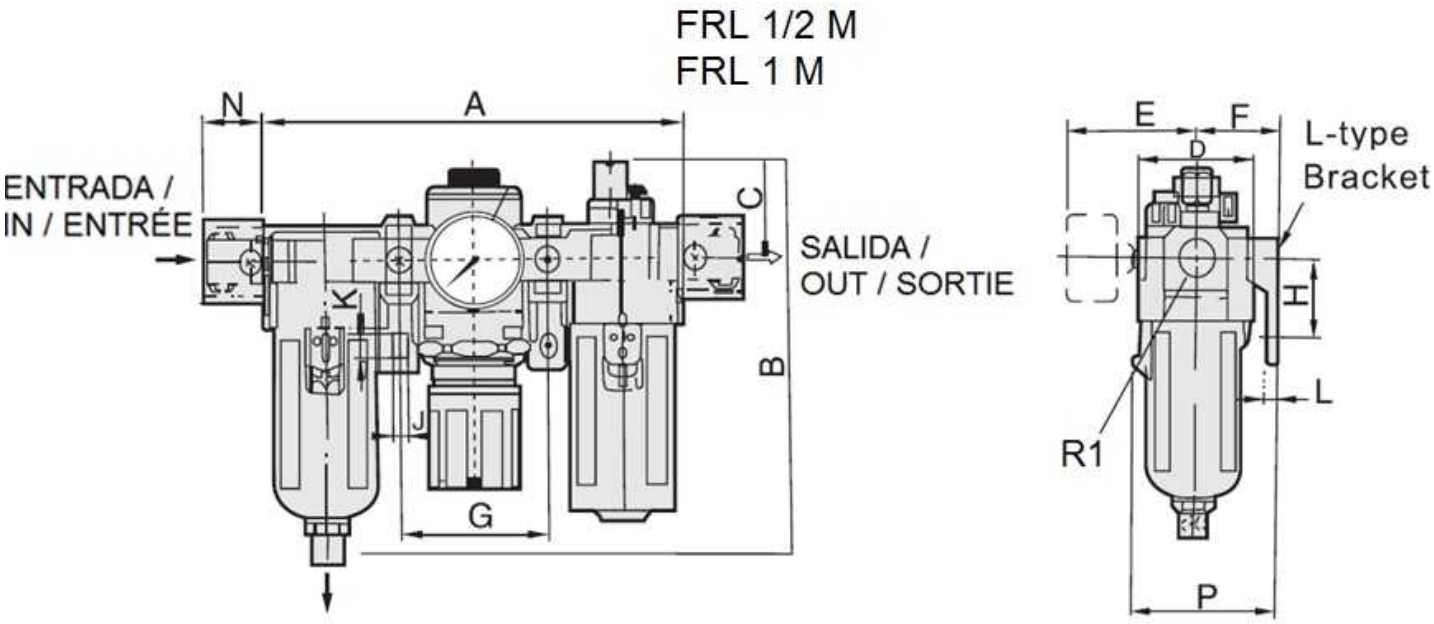

Working temp: 5 - 60 ºC

Filter precission: 25 µm

Pressure gauge included

Drain type: Manual

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.

Compressed air treatment elements

Filters

Pressure reducer + lubricant + filter (3 bodies)

Part nº	R1	Max. flow (l/min)	Max. Press. (bar)	A	B	C	D	E	F	G	H	K	L	N	P
FRL 1/4 M	1/4" BSP	500	10	140	125	38	40	56,8	30	50	24	8,5	5	23	50
FRL 1/2 M	1/2" BSP	4000	10	238	191,5	41	70	65,5	50	84	40	13	7	33	88
FRL 1 M	1" BSP	5000	10	300	271,5	48	90	75,5	69,8	105	50	16	10,5	40	115

Size 1/4 "gauge with 1/8" BSP thread
Size 1/2 "-1" gauge with 1/4 "BSP thread

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.