

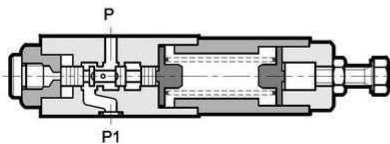


Solenoid valve
Modular Elements for NG6
Pressure reducing valve in A

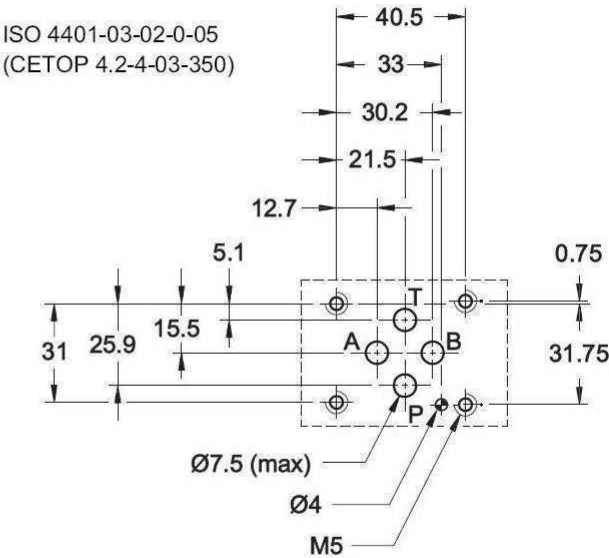

- Max. pressure -port T: 10 bar
- Max. flow rate in controlled lines: 50 l/min
- Max. flow rate in free lines: 75 l/min
- Drainage flow rate: <0.08 l/min

Part n°	Size	Max. Press. (bar)	Reg. rate (bar)
MZD2/A/50	NG-6	350	3 - 35
MZD3/A/50	NG-6	350	10 - 70
MZD4/A/50	NG-6	350	30 - 140
MZD5/A/50	NG-6	350	60 - 280