
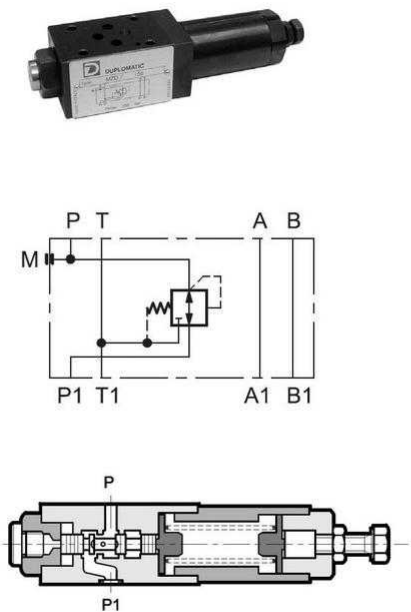


Solenoid valve
Modular Elements for NG6
Pressure reducing valve in P

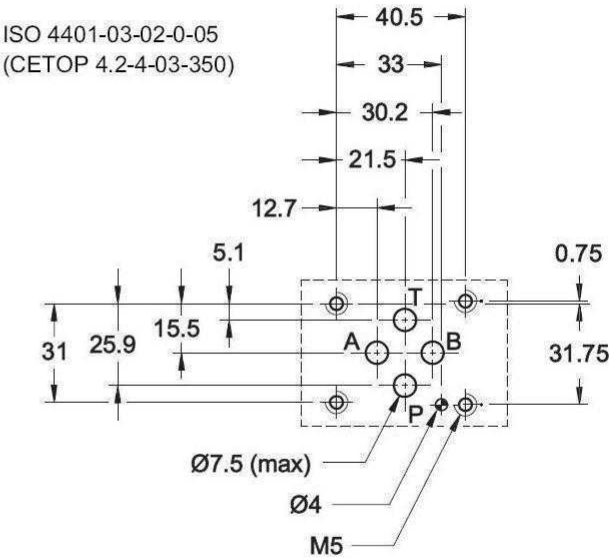

- Max. pressure -port T:** 10 bar
Max. flow rate in controlled lines: 50 l/min
Max. flow rate in free lines: 75 l/min
Drainage flow rate: <0.08 l/min

Part n°	Size	Max. Press. (bar)	Reg. rate (bar)
MZD2/50	NG-6	350	3 - 35
MZD3/50	NG-6	350	10 - 70
MZD4/50	NG-6	350	30 - 140
MZD5/50	NG-6	350	60 - 280