


Pressure relief valve double in line (steel screw control) 250 bar



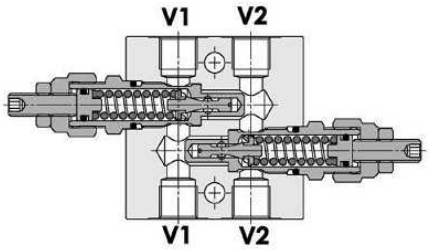



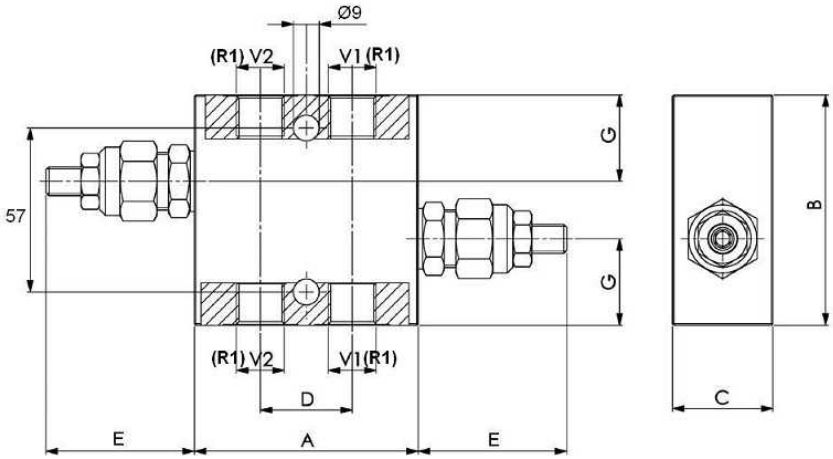

Material: Body in alluminium. Cartridge in steel zinc plated
Max.flow: 80 l/min
Max.press: 250 bar
Adjustement means: Leakproof screw

Part nº	R1	Max. flow (l/min)	Setting (bar)	Reg. rate (bar)	Press. increase (bar/turn)	Colour	A	B	C	D	E	G
VSMD40ILP3/805	3/8"BSP	40	5	5-50	10	Blanco*	78	80	35	32	52	30
VSMD40ILP3/810	3/8"BSP	40	30	30-100	20	Amarillo*	78	80	35	32	52	30
FPMD40ILP3/820	3/8"BSP	40	50	50-220	40	Verde*	78	80	35	32	52	30
VSMD40ILP3/820	3/8"BSP	40	50	50-220	40	Verde*	78	80	35	32	52	30
VSMD40ILP3/835	3/8"BSP	40	80	80-350	80	Rojo*	78	80	35	32	52	30
VSMD70ILP1/205	1/2"BSP	80	5	5-50	10	Blanco*	92	100	40	34	54,5	38
VSMD70ILP1/210	1/2"BSP	80	30	30-100	20	Amarillo*	92	100	40	34	54,5	38
VSMD70ILP1/220	1/2"BSP	80	50	50-220	40	Verde*	92	100	40	34	54,5	38
VSMD70ILP1/235	1/2"BSP	80	80	80-350	50	Rojo*	92	100	40	34	54,5	38

*Spring color

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.