


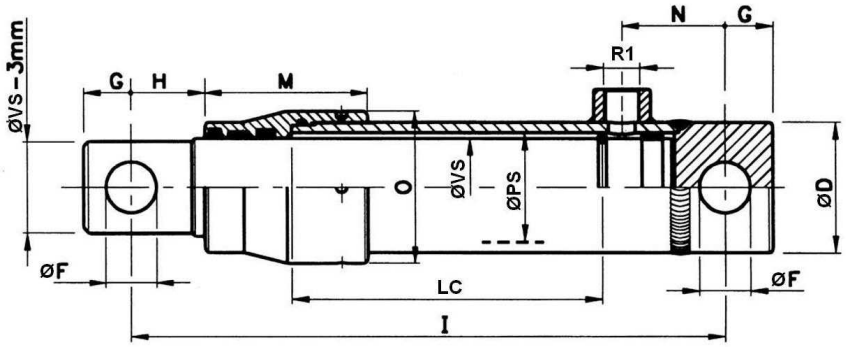

Maximum work pressure 210 bar

Temperature -30ºC - 110ºC

Part nº	R1	Kg/100 bar	Piston rod	ØPS	Stroke (mm)	ØD	ØF	G	H	I	M	N	O
SE45200	3/8" BSP	1.590	45	50 H9	200	60	23,4	22	34	330	75	47	70
SE45300	3/8" BSP	1.590	45	50 H9	300	60	23,4	22	34	430	75	47	70
SE45400	3/8" BSP	1.590	45	50 H9	400	60	23,4	22	34	530	75	47	70
SE45550	3/8" BSP	1.590	45	50 H9	550	60	23,4	22	34	680	75	47	70
SE45700	3/8" BSP	1.590	45	50 H9	700	60	23,4	22	34	830	75	47	70
SE50200	3/8" BSP	1.960	50	55 H9	200	65	25,5	25	49	360	80	50	75
SE50300	3/8" BSP	1.960	50	55 H9	300	65	25,5	25	49	460	80	50	75
SE50400	3/8" BSP	1.960	50	55 H9	400	65	25,5	25	49	560	80	50	75
SE50550	3/8" BSP	1.960	50	55 H9	550	65	25,5	25	49	710	80	50	75
SE50700	3/8" BSP	1.960	50	55 H9	700	65	25,5	25	49	860	80	50	75
SE55300	3/8" BSP	2.370	55	60 H9	300	70	25,5	25	41	460	95	50	85
SE55550	3/8" BSP	2.370	55	60 H9	550	70	25,5	25	41	710	95	50	85
SE55700	3/8" BSP	2.370	55	60 H9	700	70	25,5	25	41	860	95	50	85
SE60200	3/8" BSP	2.820	60	65 H9	200	75	25,5	25	36	360	95	50	89
SE60300	3/8" BSP	2.820	60	65 H9	300	75	25,5	25	36	460	95	50	89
SE60400	3/8" BSP	2.820	60	65 H9	400	75	25,5	25	36	560	95	50	89
SE60550	3/8" BSP	2.820	60	65 H9	550	75	25,5	25	36	710	95	50	89
SE60700	3/8" BSP	2.820	60	65 H9	700	75	25,5	25	36	860	95	50	89

***** Review attached PDF*****

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.