
Solenoid valves

Subplates for NG6

Series subplate for NG6 directional valve with relief valve, A & B side ports



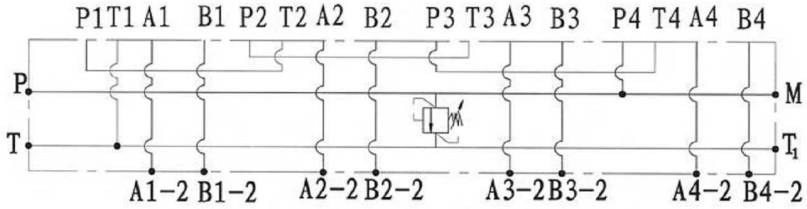

Part nº	R1	Nº directional valves	Flow (l/min)
PF2SLCL180 H	3/8" BSP	2	40
PF3SLCL180 H	3/8" BSP	3	40
PF4SLCL180 H	3/8" BSP	4	40

***** Review attached PDF*****
Maximum flow: 40 L/min
Regulation rate: 20-250 bar
P y T: 1/2" / A y B: 3/8"

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.