

Maneuvering valves


Manual / Mechanical Actionning


Shrouded push button 3/2 normally open



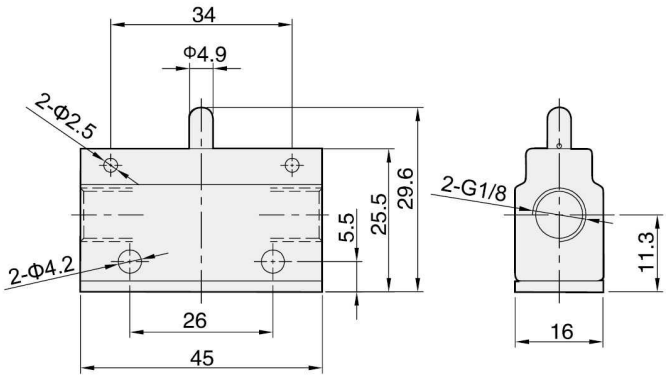







Working pressure(Bar)	1.5 - 8.0
Guaranteed pressure(Bar)	12
Working temperature(°C)	-5 - 60

Part nº	R1	Details
NEU100290	1/8" BSP	Rojo / Red

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.