

Hydraulic valves


Check valves

Single pilot operated check valve in block







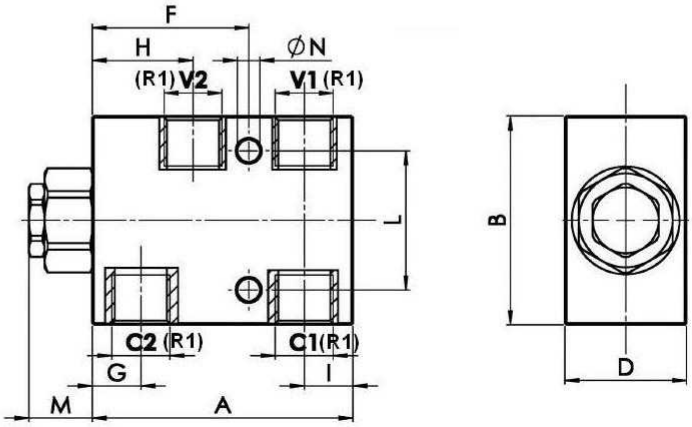

Material Body in Aluminium

Cracking Pressure 2,5 bar (5bar and 10bar on request)

Part nº	R1	Max. flow (l/min)	Max. Press. (bar)	Pilot ratio	L	ØN	A	B	D	F	G	H	I	M
VT004006	3/8" BSP	30	250	1 : 7	40	6,5	75	60	35	45	14	29	14	18,5
VT004008	1/2" BSP	45	250	1 : 3.5	40	8,5	95	70	35	55	21	38	19	15

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.