



Single pilot operated check valve - line mounted



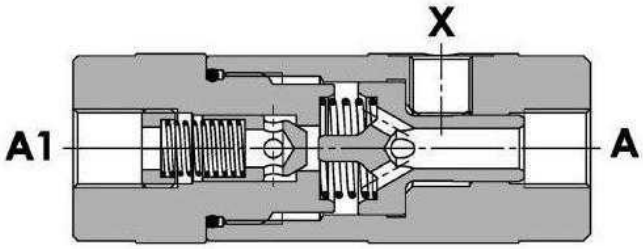



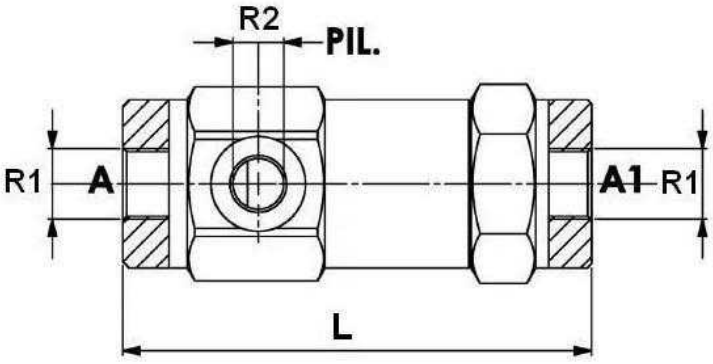

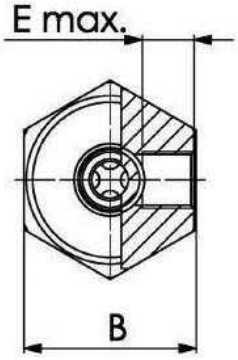

Material Body in Steel
Cracking Pressure 0,5 bar

Part nº	R1	R2	Max. flow (l/min)	Max. Press. (bar)	Pilot ratio	L	B	E
FPS 1/4	1/4" BSP	1/4" BSP	12	350	1 : 9	103	36	11
FPS 3/8	3/8" BSP	1/4" BSP	30	350	1 : 6	109	40	11,5
FPS 1/2	1/2" BSP	1/4" BSP	45	350	1 : 4,5	120	42	11
FPS 3/4	3/4" BSP	1/4" BSP	85	300	1 : 3,7	131	55	14

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.