

Hydraulic valves

Check valves

Single pilot operated check valve



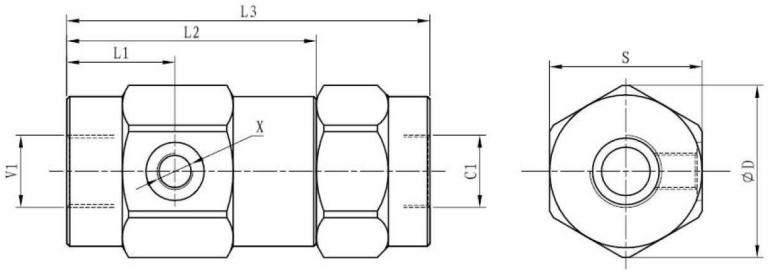



MODEL	L1	L2	L3	V1 C1	X	S	ϕ D
ASP1/4	29	78	101.5	G1/4"	G1/4"	40	44
ASP3/8	31.5	82	106	G3/8"	G1/4"	41	45
ASP1/2	36	85	120	G1/2"	G1/4"	42	47

Part nº	R1	Max. flow (l/min)	Max. Press. (bar)	Setting (bar)	Pilot ratio
ASP1/4	1/4" BSP	20	315	1	4.7:1
ASP3/8	3/8" BSP	35	315	1	4.4:1
ASP1/2	1/2" BSP	50	315	1	4.6:1

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.