

Control valves

Electrical actuating

Solenoid pneumatic valve 5/2 monostable





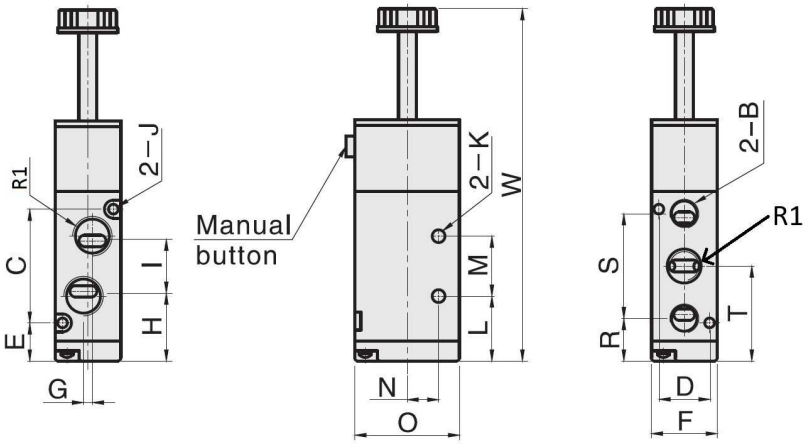

Working pressure(Bar)	1.5~8
Guaranteed pressure(Bar)	12
Working temperature(°C)	−5~80
Max. acting frequency	5 cycles/s
Port size	1/8", 1/4"

Model\Sign	R1	B	C	D	E	F	G	H	I	J	K	L	M	N	O	R	S	T	W
NEU100070	G1/8	G1/8	30	13	13.2	18	3	20.2	16	3.3	3.3	21.2	14	9.5	27	14.5	27.5	28.2	98.5
NEU100073	G1/8	G1/8	38	17	12.7	22	0	22.7	18	3.3	4.3	21.7	20	10.5	35	14.2	36	31.7	117.7
NEU100075	G1/4	G1/8	38	17	12.7	22	3	21.7	20	3.3	4.3	21.7	20	10.5	35	14.2	36	31.7	117.7
NEU100080	G3/8	G1/4	50	20	15	27	4	28	24	4.3	4.3	28	24	13.5	40	17.5	45	40	135.5
NEU100085	G1/2	G1/2	72	27	21	34	4	39	36	4.3	5.5	43	28	17.5	50	25.5	63	57	168

Part nº	R1	Details	Type
NEU100070	1/8" BSP	1/8"	5/2
NEU100073	1/8" BSP	1/4"	5/2
NEU100075	1/4" BSP	1/4"	5/2
NEU100080	3/8" BSP	3/8"	5/2
NEU100085	1/2" BSP	1/2"	5/2

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.