
Aluminium coupling european format

SRL type couplings

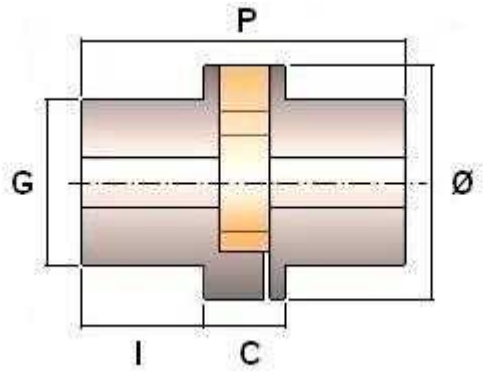

Material Steel

SRL-75 V MEC2525 Mechanized cylinder 25 mm

SRL-75 V MEC25 Half-mechanized cylinder 25 mm

Part nº	Shaft	Spiders	Ø	Spider type	N/n	Inside Spider Ø	Inertia moment	Max. torque	R.P.M.	ØG	C	I	P
SRL-50 V	0-20	PUR	50	50x10	0	20	0	1,2	10000	32	18	22	62
SRL-60 V	0-24	PUR	60	60x14	0	27	0	3,5	8500	40	24	28	80
SRL-75 V	13-34	PUR	75	75x16	0,01	31	0	8	7000	50	27	36,5	100
SRL-75 V MEC25	13-34	PUR	75	75x16	0,01	31	0	8	7000	50	27	36,5	100
SRL-75 V MEC2525	13-34	PUR	75	75x16	0,01	31	0	8	7000	50	27	36,5	100
SRL-90 V	13-45	PUR	90	90x20	0,02	37	0	16	6000	65	32	46	124
SRL-105/20 C	0-48	Caucho/Rubber	105	105x20	0,03	49	0,01	27	5500	72	36	53	142
SRL-105/20 V	0-48	PUR	105	105x20	0,03	49	0,01	27	5500	72	36	53	142
SRL-120/20 C	0-48	Caucho/Rubber	120	120x20	0,04	47	0,01	40	4500	80	38	60	158
SRL-120/20 V	0-48	PUR	120	120x20	0,04	47	0,01	40	4500	80	38	60	158
SRL-135 C	0-65	Caucho/Rubber	135	135x25	0,06	55	0,02	65	4000	90	45	70	185
SRL-135 V	0-65	PUR	135	135x25	0,06	55	0,02	65	4000	90	45	70	185
SRL-150 C	0-70	Caucho/Rubber	150	150x28	0,09	63	0,03	90	3500	100	52	80	212
SRL-150 V	0-70	PUR	150	150x28	0,09	63	0,03	90	3500	100	52	80	212
SRL-175 V	0-85	PUR	175	175x32	0,13	67	0,05	135	3000	115	58	90	238
SRL-200/35 V	0-100	PUR	200	200x35	0,19	71	0,12	190	2750	130	65	100	265
SRL-200/40 V	0-100	PUR	200	200x40	0,35	100	0,13	305	2750	130	70	100	270

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.