

Control valves

Sectional hydraulic control valves


Stackable control valve YFMC100 with lever control return to center by spring and relief valve



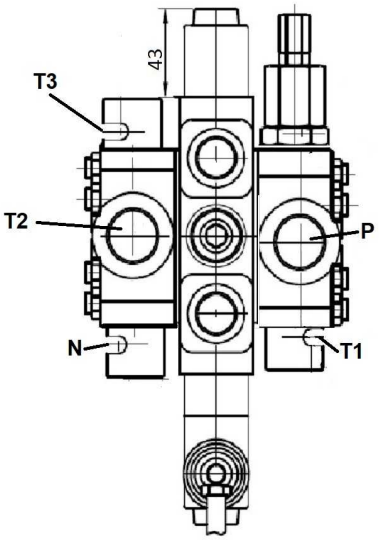

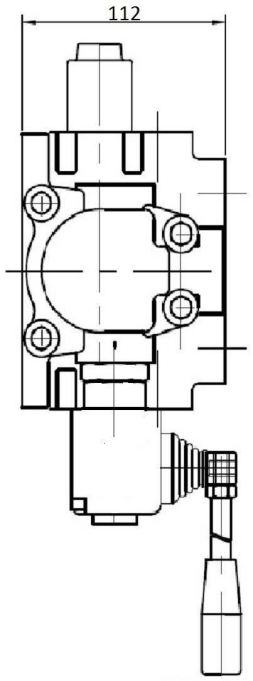

Number of sections / nº secciones: "n"= max 8
All the threads / Todas las roscas: R1
Max pressure / Presión máx: P=210 bar
A,B=250 bar
T<50 bar
Max flow/ caudal máx: 100 l/min
Nominal flow/ caudal nominal: 80 l/min

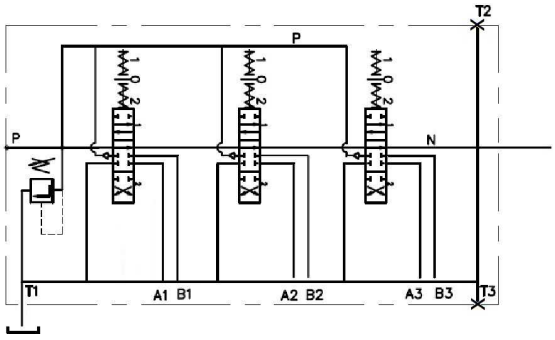

Part nº	R1	Type	Max. flow (l/min)	Max. Press. (bar)	Levers
YFMC100/1 1P 3/4 DE	3/4" BSP	D	100	210	1
YFMC100/2 2P 3/4 DD	3/4" BSP	D-D	100	210	2
YFMC100/3 3P 3/4 DDD	3/4" BSP	D-D-D	100	210	3
YFMC100/4 4P 3/4 DDDD	3/4" BSP	D-D-D-D	100	210	4
YFMC100/5 5P 3/4 DDDDD	3/4" BSP	D-D-D-D-D	100	210	5
YFMC100/6 6P 3/4 DDDDDD	3/4" BSP	D-D-D-D-D-D	100	210	6

***** Review attached PDF*****
Standard setting pressure: 180 bar
T3- ENABLE WHEN PRESSURE CONTINUATION FITTING IS PLACED.
N- PRESSURE CONTINUATION FITTING.

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.