


Stackable control valve YFMCE70 solenoid driven with relief valve

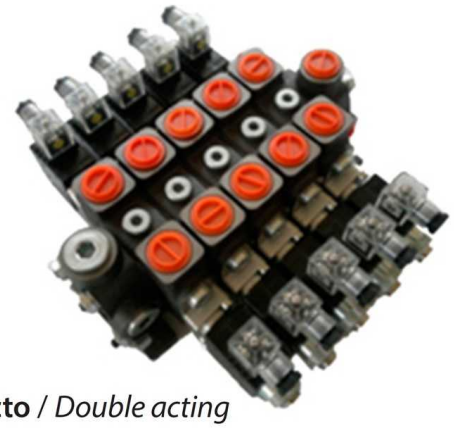

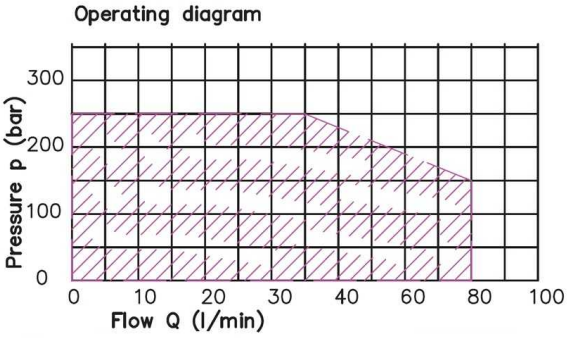

Doble efecto / *Double acting*



Pressure at A and B 300 bar
Pressure at T 35 Bar
Pressure at P 250 Bar
Max 8 bodies
relief valve 80 to 315 bar

Part nº	R1	Max. flow (l/min)	Max. Press. (bar)	Levers	Voltage (V)
YFMCE70/1 1P 1/2 DE	1/2" BSP	70	300	1	12VDC
YFMCE70/2 2P 1/2 DD	1/2" BSP	70	300	2	12VDC
YFMCE70/3 3P 1/2 DDD	1/2" BSP	70	300	3	12VDC
YFMCE70/4 4P 1/2 DDDD	1/2" BSP	70	300	4	12VDC

***** Review attached PDF*****

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.