

Diverter valves

Stackable diverter valve 6 ways 3/8 DC





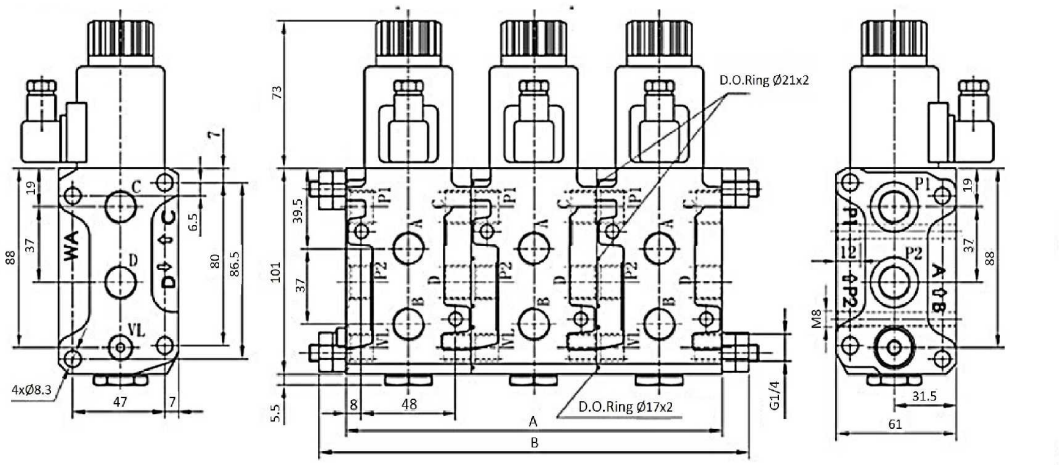


**Operating temp:** [-25, +60] ºC

**Material:** Body is molten made.ANTI-CORROSION black primer

**Torque to tight the nucleus:** 35 Nm

**Assembly torque:** 10 Nm

**maximum working pressure without drain:** 210 bar

| Part nº | R1 | Nº ways | Voltage (V) | Max. flow (l/min) | Max. Press. (bar) | Nº of elements | A | B |
|---|---|---|---|---|---|---|---|---|
| **SA6V3812CC-1** | 3/8" BSP | 6 | 12VDC | 50 | 250 | 1 | 64 | 86 |
| **SA6V3812CC-2** | 3/8" BSP | 8 | 12VDC | 50 | 250 | 2 | 128 | 150 |
| **SA6V3812CC-3** | 3/8" BSP | 10 | 12VDC | 50 | 250 | 3 | 192 | 214 |
| **SA6V3812CC-4** | 3/8" BSP | 12 | 12VDC | 50 | 250 | 4 | 256 | 278 |
| **SA6V3812CC-5** | 3/8" BSP | 14 | 12VDC | 50 | 250 | 5 | 320 | 342 |
| **SA6V3812CC-6** | 3/8" BSP | 16 | 12VDC | 50 | 250 | 6 | 384 | 406 |
| **SA6V3824CC-1** | 3/8" BSP | 6 | 24VDC | 50 | 250 | 1 | 64 | 86 |
| **SA6V3824CC-2** | 3/8" BSP | 8 | 24VDC | 50 | 250 | 2 | 128 | 150 |
| **SA6V3824CC-3** | 3/8" BSP | 10 | 24VDC | 50 | 250 | 3 | 192 | 214 |
| **SA6V3824CC-4** | 3/8" BSP | 12 | 24VDC | 50 | 250 | 4 | 256 | 278 |
| **SA6V3824CC-5** | 3/8" BSP | 14 | 24VDC | 50 | 250 | 5 | 320 | 342 |
| **SA6V3824CC-6** | 3/8" BSP | 16 | 24VDC | 50 | 250 | 6 | 384 | 406 |

***** Review attached PDF*****
ANTI-CORROSION black primer

*The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.*