


Stackable double pilot check valve plate mounting



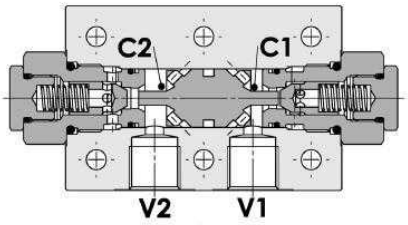



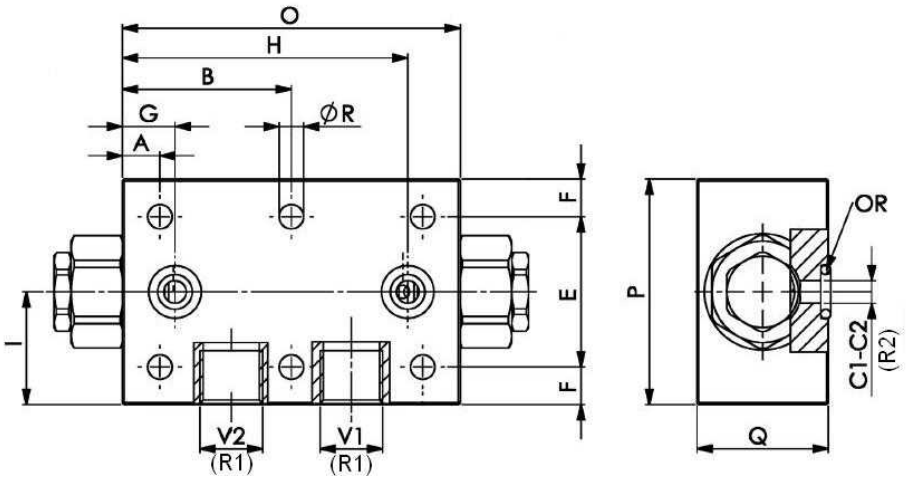

Materials · Body: Aluminium
· Internal components: Hardened and Ground Steel

Cracking Pressure 2,5 bar (5-10 bar on request)

Max Working Pressure 250 bar

O'ring (OR) · FPSF 3/8": 9,19x2,62
· FPSF 1/2": 15,54x2,62
· FPSF 3/4": 18,64x3,53

P=E+2F

Part nº	R1	R2	Max. flow (l/min)	Max. Press. (bar)	Pilot ratio	ØR	A	B	E	F	G	H	I	O	Q
FPDF 3/8	3/8" BSP	6 mm	25	250	1:7	6,5	10	45	40	10	14	76	30	90	34,5
FPDF 1/2	1/2" BSP	8 mm	45	250	1:3,5	8,5	15	55	40	15	22,5	87,5	35	110	34,5
FPDF 3/4	3/4" BSP	14 mm	85	250	1:4	10,5	15	82,5	50	20	30	135	45	165	49,5

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.