


Stackable Solenoid valves


Stackable Solenoid valve Spool no.6



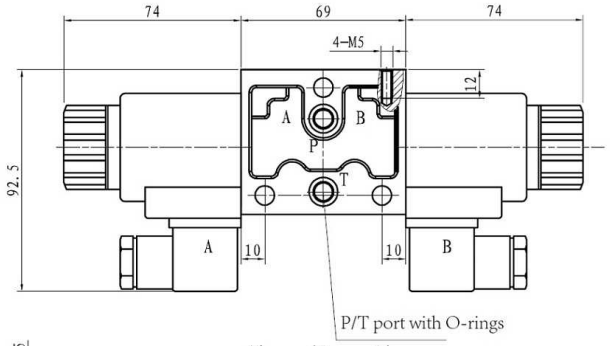

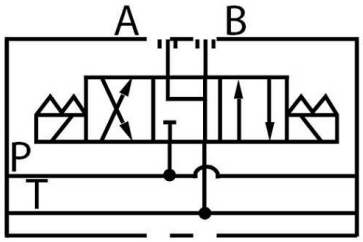



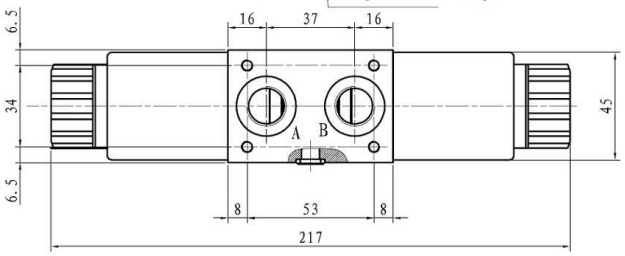

Part nº	R1	Size	Voltage (V)	Max. flow (l/min)	Max. Press. (bar)
YEAT-6-3/8-12CC H	3/8" BSP	NG-6	12VDC	40	310
YEAT-6-3/8-24CC H	3/8" BSP	NG-6	24VDC	40	310
YEAT-6-3/8-220CA H	3/8" BSP	NG-6	220VAC	40	310

Maximum stackable bodies is 12
Tightening torque of the rods that join the valves must be 20Nm
Gasket 21.95 x 1.78

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.