


Stackable Solenoid valve with lever - Spool no.1

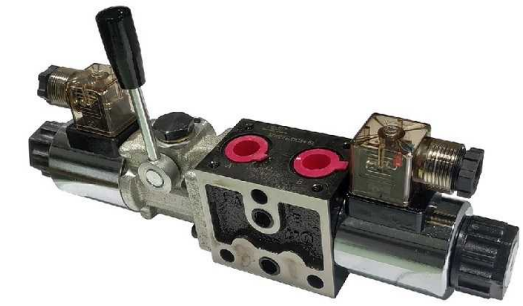

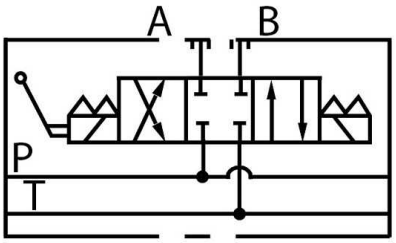

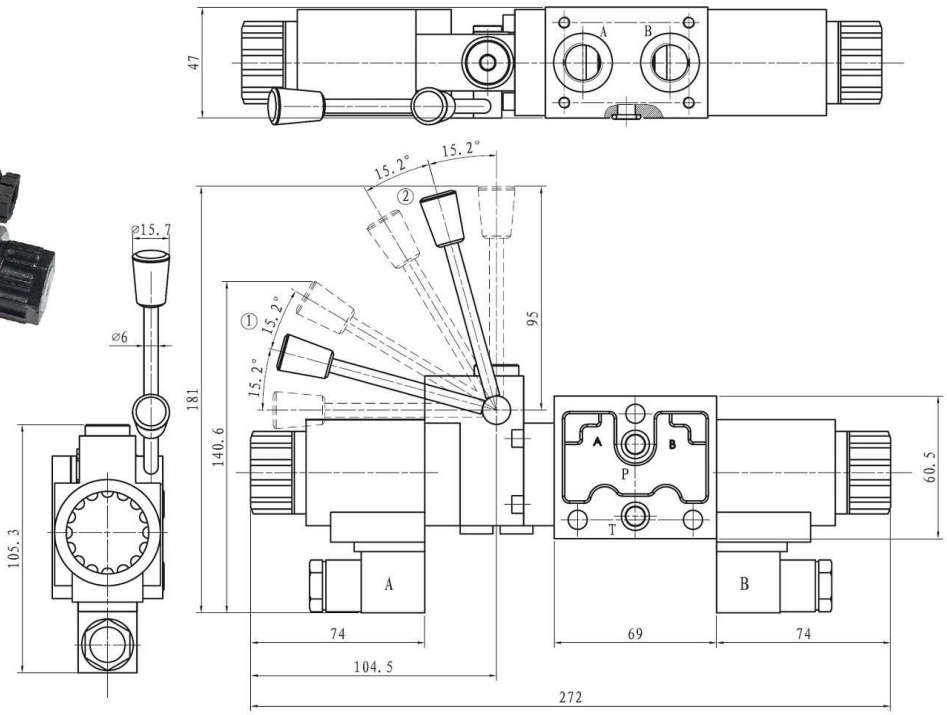

Part nº	R1	Size	Voltage (V)	Max. flow (l/min)	Max. Press. (bar)
YEATM-1-3/8-12CC H	3/8" BSP	NG-6	12VDC	40	310
YEATM-1-3/8-24CC H	3/8" BSP	NG-6	24VDC	40	310
YEATM-1-3/8-220CA H	3/8" BSP	NG-6	220VAC	40	310

Max. 12 bodies.Tightening torque of the rods that join the valves must be 20Nm.
If YREAT-D H is mounted on top, the lever actuator must be turned through 180°. If YLEA-D H or YOEAT-D H is installed, YSEAT-SUP H must be mounted on top.

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.