
Solenoid valves

Subplates for NG6

Subplate for NG6 directional valves, one element, with relief valve, A & B side ports

Carbon steel, blued treatment



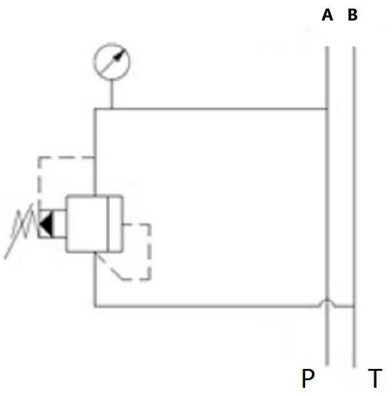

A, B 3/8"BSP

P, T 1/2" BSP

Part nº	R1	Nº directional valves	Flow (l/min)
PF1CL180 H	3/8" BSP	1	40

***** Review attached PDF*****
Maximum flow: 40 L/min
Regulation rate: 20-250 bar
It includes pressure gauge intake female thread 1/4" BSP
Maximum pressure supported in the system 350 Bar

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.