Thermal switch 36-47º

T24712CC con relé/ with relay
T24724CC

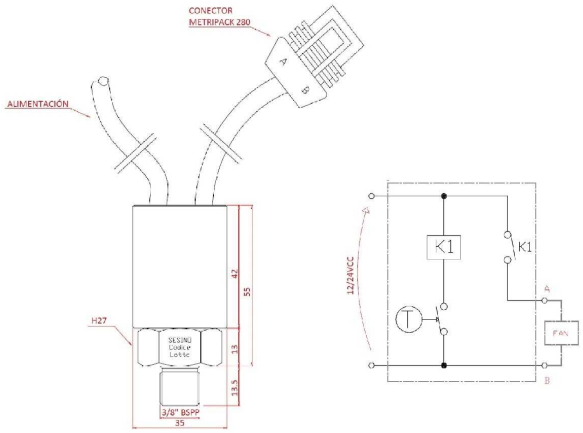

T247 sin relé/ without relay

Max Pressure	250 bar
Electrical Load Date	12V / 30A 24V / 30A
Fluid Temperature	-40 ÷ +120 ºC
Tightening Torque	25 Nm

Contact temperature T247: 47ºC

Part nº	R1	P(IP)
T247	3/8'' BSP	65
T24712CC	3/8'' BSP	65
T24724CC	3/8'' BSP	65

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.