

Unidirectional flow restrictor valve 210 bar F-F Chromed





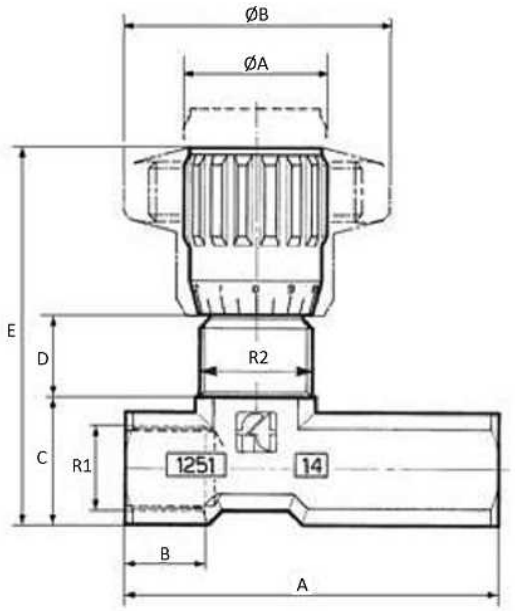

Working temperature: -20ºC \ 100ºC
Body: OT 58 - UNI 5705 Nickel plated
OR Nitrile
Ball guide: Nylon 66 + Carbon fiber

Part nº	R1	R2	Max. flow (l/min)	Max. Press. (bar)	Filtration degree	ØA	ØB	A	B	C	D	E
FT1251U04	1/4" BSP	M17X1	12	210	25	Ø22	Ø40	56	12	20	11	57
FT1251U06	3/8" BSP	M20X1	30	210	25	Ø27	Ø50	64,5	13	24	12,5	69
FT1251U08	1/2" BSP	M25X1,5	60	210	25	Ø33	Ø70	87	16	29	13	82

***** Review attached PDF*****

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.