
Unidirectional flow restrictor valve- Fine Adjustment



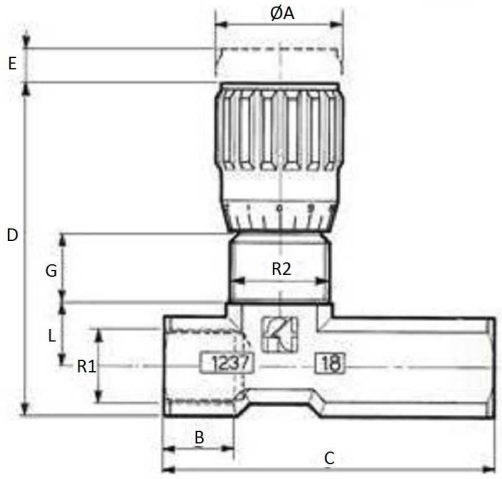

Working temperature: -20ºC \ 100ºC
Body: OT 58 - UNI 5705 - Passivated
Antiextrusion ring: PTFE
OR: Nitrile

Part nº	R1	R2	Max. flow (l/min)	Max. Press. (bar)	Filtration degree	ØA	B	C	D	E	G	L
FT12375U02	1/8" BSP	M15X1	2,2	210	25	Ø22	8	46,5	55	4	12	9,5

***** Review attached PDF*****

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.