


Unidirectional flow restrictor valve in A line NG-6





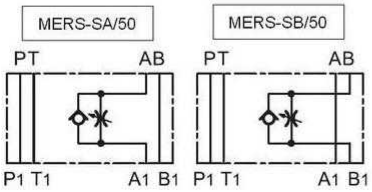

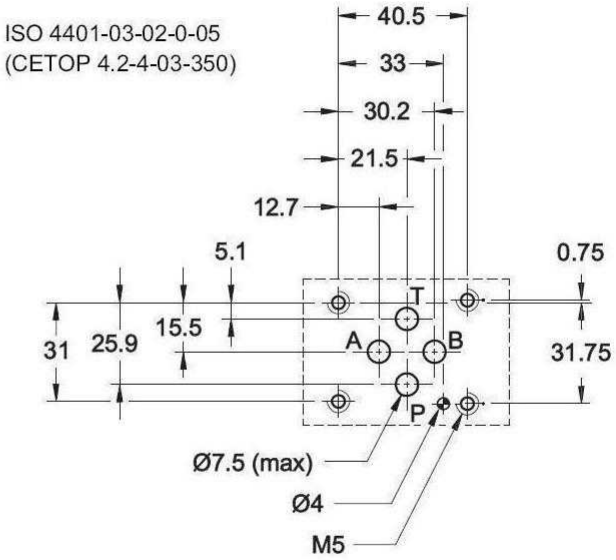

Check valve cracking pressure	0,5 bar
Max. flow rate in controlled lines	50 l/min
Max. flow rate in free lines	75 l/min
Min. controlled flow rate with DP=10bar	<0,060 l/min

Part nº	Size	Direction	Points A-B
MERS-SA/50	NG-6	Salida / Exit	A

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.