

Unidirectional flow restrictor valve in line





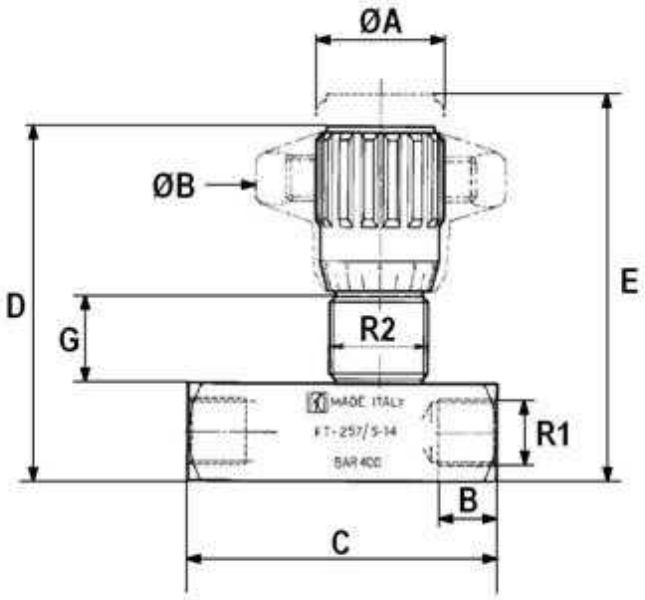

Working temperature: -20ºC \ 100ºC
Body: 9 S Mn Pb 23 - UNI 5105
OR: Nitrile
Antiextrusion ring: PTFE

Part nº	R1	R2	Max. flow (l/min)	Max. Press. (bar)	Burst pressure (bar)	Filtration degree	ØA	ØB	B	C	D	E	G
FT257502	1/8" BSP	M17X1	6	400	1.600	25	Ø22	Ø40	8,5	50	59	64	13,5
FT257504	1/4" BSP	M20X1	14	400	1.600	25	Ø27	Ø50	12,5	66	71	78	17
FT257506	3/8" BSP	M25X1,5	32	400	1.600	25	Ø33	Ø70	12,5	79	84	93	19,5
FT257508	1/2" BSP	M30X1,5	48	400	1.600	25	Ø38	Ø80	15,5	94,5	97	107	21
FT257512	3/4" BSP	M40X1,5	80	400	1.600	25	Ø47	Ø100	17	115	120,5	132,5	26,5
FT257516	1" BSP	M50X1,5	180	320	1.300	25	Ø58	Ø120	20	138,5	151,5	167,5	35
FT257520	1" 1/4 BSP	M50X1,5	200	320	1.300	25	Ø58	Ø120	22	157	156,5	172,5	35
FT257524	1" 1/2 BSP	M55X2	210	320	1.300	25	Ø58	Ø120	24	190	167	181	35

***** Review attached PDF*****

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.