



Unidirectional flow restrictor valve (metallic knob)







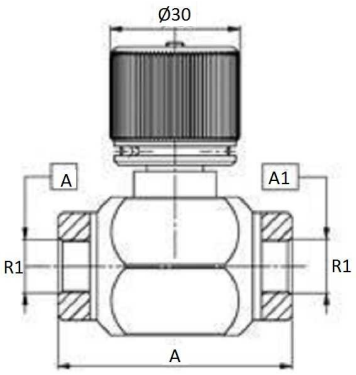



Materials: Body and internal parts are steel made. External surface is zinc plated.
Rated flow: 40 l/min
Max.pressure: 300 bar
Cracking press.check valve: 0,5 bar standard

Part nº	R1	Max. flow (l/min)	Max. Press. (bar)	A	B	D
FPSU 1/4	1/4" BSP	12	300	54	64	32
FPSU 3/8	3/8" BSP	25	300	62	64	32
FPSU 1/2	1/2" BSP	40	280	62	64	32

***** Review attached PDF*****

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.