

Hydraulic valves


Flow control valve

Unidirectional flow restrictor valve





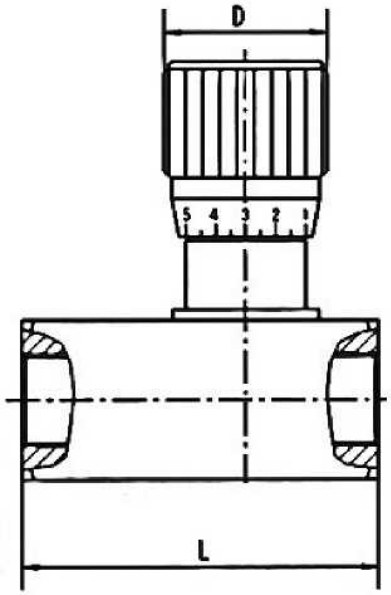

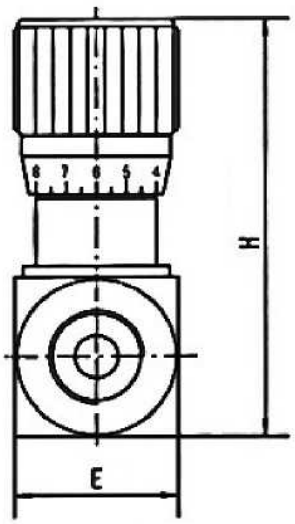

Temperature: -20° ~ 70°

Cracking pressure: 0.5 bar

Part nº	R1	Max. flow (l/min)	Max. Press. (bar)	D	E	H	L
RCU04	1/4" BSP	40	315	30	28	82	64
RCU06	3/8" BSP	60	315	30	28	82	70
RCU08	1/2" BSP	85	315	38	38	108	83
RCU12	3/4" BSP	185	315	38	38	108	89
RCU16	1" BSP	200	315	47	48	138	117

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.