

Unidirectional pressure compensated flow restrict or valve 320 BAR





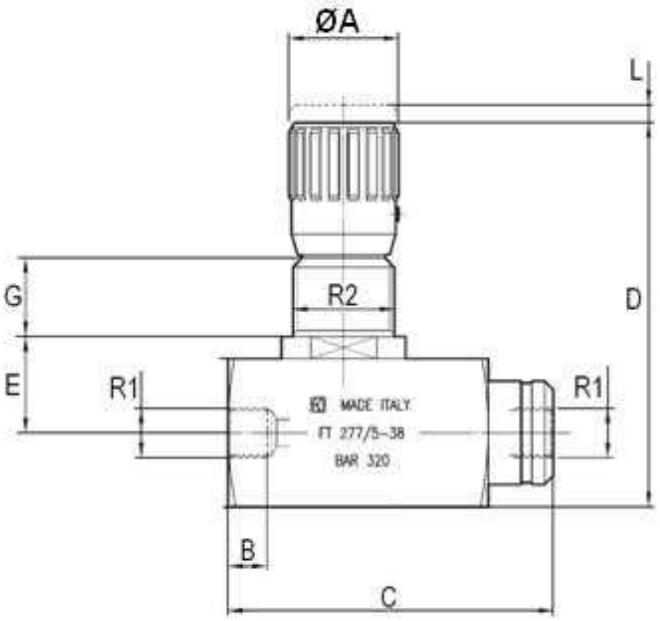

Working temperature: -20ºC \ 70ºC
Body: 9 S Mn Pb 23 - UNI 5105
OR: Nitrile
Antiextrusion ring: PTFE

Part nº	R1	R2	Max. flow (l/min)	Max. Press. (bar)	Filtration degree	ØA	B	C	D	E	G	L
FT2775U12	3/4" BSP	M50X1,5	90	320	25	Ø58	17	163	182,5	45	35	7,5

***** Review attached PDF*****

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.