

Control valves


Electrical control valve

YEMC50 - 3/8” BSP Stackable control valve solenoid driven + handle



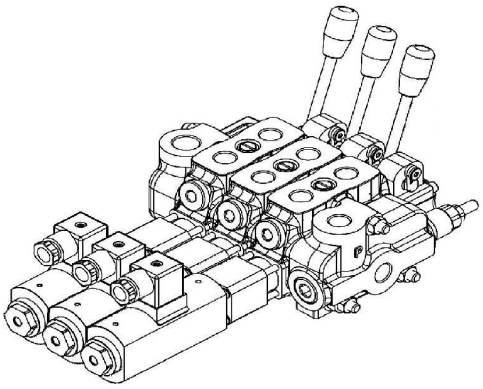

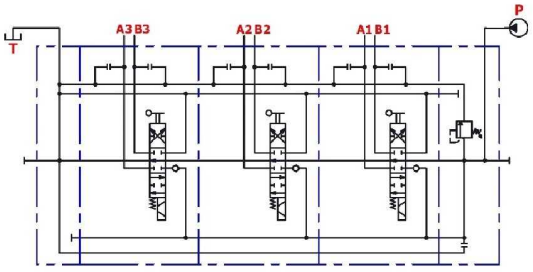

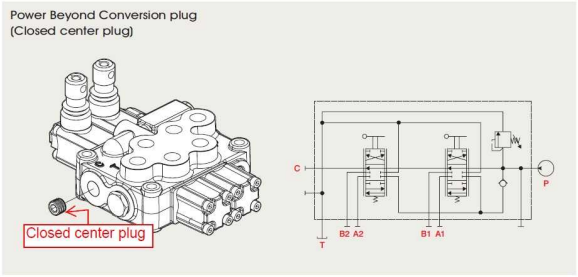

Part nº	R1	Voltage (V)	Max. flow (l/min)	Max. Press. (bar)	Levers	A	B	L
YEMC50/1 3/8 1P DE 12VDC	3/8" BSP *	12 VDC	50	315	1	327,8	159,1	118,5
YEMC50/2 3/8 2P DE 12VDC	3/8" BSP *	12 VDC	50	315	2	327,8	159,1	156,5
YEMC50/3 3/8 3P DE 12VDC	3/8" BSP *	12 VDC	50	315	3	327,8	159,1	194,5
YEMC50/4 3/8 4P DE 12VDC	3/8" BSP *	12 VDC	50	315	4	327,8	159,1	232,5
YEMC50/5 3/8 5P DE 12VDC	3/8" BSP *	12 VDC	50	315	5	327,8	159,1	270,5
YEMC50/6 3/8 6P DE 12VDC	3/8" BSP *	12 VDC	50	315	6	327,8	159,1	308,5
YEMC50/1 3/8 1P DE 24VDC	3/8" BSP *	24 VDC	50	315	1	327,8	159,1	118,5
YEMC50/2 3/8 2P DE 24VDC	3/8" BSP *	24 VDC	50	315	2	327,8	159,1	156,5
YEMC50/3 3/8 3P DE 24VDC	3/8" BSP *	24 VDC	50	315	3	327,8	159,1	194,5
YEMC50/4 3/8 4P DE 24VDC	3/8" BSP *	24 VDC	50	315	4	327,8	159,1	232,5
YEMC50/5 3/8 5P DE 24VDC	3/8" BSP *	24 VDC	50	315	5	327,8	159,1	270,5
YEMC50/6 3/8 6P DE 24VDC	3/8" BSP *	24 VDC	50	315	6	327,8	159,1	308,5
YEMC50/1 3/8 1P DE12V-ND	3/8" BSP	12 VDC	50	315	1	372,6	157	120,5
YEMC50/2 3/8 2P DE12V-ND	3/8" BSP	12 VDC	50	315	2	372,6	157	158,5
YEMC50/3 3/8 3P DE12V-ND	3/8" BSP	12 VDC	50	315	3	372,6	157	196,5
YEMC50/4 3/8 4P DE12V-ND	3/8" BSP	12 VDC	50	315	4	372,6	157	234,5
YEMC50/5 3/8 5P DE12V-ND	3/8" BSP	12 VDC	50	315	5	372,6	157	272,5
YEMC50/6 3/8 6P DE12V-ND	3/8" BSP	12 VDC	50	315	6	372,6	157	310,5
YEMC50/1 3/8 1P DE24V-ND	3/8" BSP	24 VDC	50	315	1	372,6	157	120,5
YEMC50/2 3/8 2P DE24V-ND	3/8" BSP	24 VDC	50	315	2	372,6	157	158,5
YEMC50/3 3/8 3P DE24V-ND	3/8" BSP	24 VDC	50	315	3	372,6	157	196,5
YEMC50/4 3/8 4P DE24V-ND	3/8" BSP	24 VDC	50	315	4	372,6	157	234,5
YEMC50/5 3/8 5P DE24V-ND	3/8" BSP	24 VDC	50	315	5	372,6	157	272,5

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.

Control valves

Electrical control valve

YEMC50 - 3/8” BSP Stackable control valve solenoid driven + handle

Part nº	R1	Voltage (V)	Max. flow (l/min)	Max. Press. (bar)	Levers	A	B	L
YEMC50/6 3/8 6P DE24V-ND	3/8" BSP	24 VDC	50	315	6	372,6	157	310,5

***** Review attached PDF*****

* While stocks last

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.