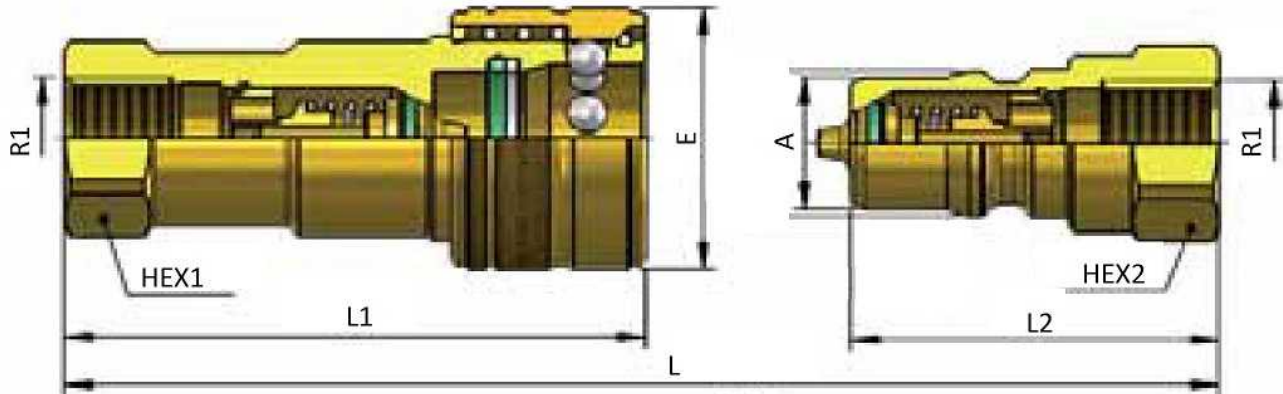


ISO B Quick release coupling brass**1/1****Material: Brass****Joints: FKM****Working temperature: -25°C
/ +200°C**

Part nº	R1	Working Pressure (bar)	ISO size	BG size	Coupling	Water flow(l/min)	FLOW MAX (l/min)	L	L1	L2	HEX 1	HEX 2	ØE	A
A850104	1/4" BSP	200	6,3	1	M	12	24	98		38		19		14,2
A850106	3/8" BSP	200	10	2	M	23	46	109,7		42,5		22		19,1
A850108	1/2" BSP	180	12,5	3	M	45	90	123,7		48		27		23,5
A850112	3/4" BSP	130	19	4	M	106	220	148,5		57		34		31,4
A850116	1" BSP	130	25	5	M	189	260	171,3		65,5		41		37,80
A850120	1"1/4 BSP	60	40	7	M	379	757	253,5		127		65		44,5
A850124	1"1/2 BSP	60	40	7	M	379	757	253,5		127		65		44,5
A850132	2" BSP	50	50	8	M	757	1.000	284,5		142,5		90		63,2
A850204	1/4" BSP	200	6,3	1	H	12	24	98	60		19		28	
A850206	3/8" BSP	200	10	2	H	23	46	109,7	67,2		22		35	
A850208	1/2" BSP	180	12,5	3	H	45	90	123,7	75,7		27		44	
A850212	3/4" BSP	130	19	4	H	106	220	148,5	91,5		34		52	
A850216	1" BSP	130	25	5	H	189	260	171,3	105,8		41		60	
A850220	1"1/4 BSP	60	40	7	H	379	757	253,5	126,5		65		78,5	
A850224	1"1/2 BSP	60	40	7	H	379	757	253,5	126,5		65		78,5	
A850232	2" BSP	50	50	8	H	757	1.000	284,5	142		90		105	