
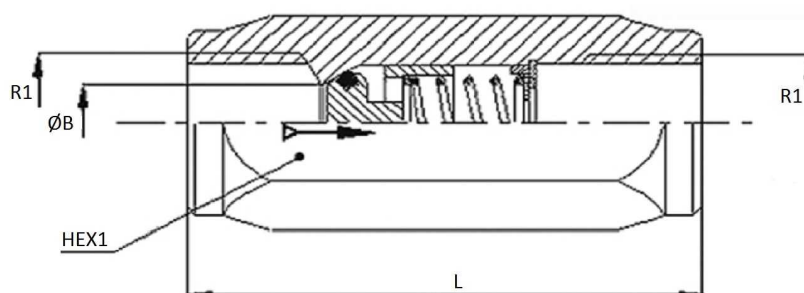


Check-valve line mounting BSP

1/1



Materials: · Body and internal parts: Stainless steel AISI 316
· Seals: FKM

Part nº	R1	FLOW MAX (l/min)	MAX. PRESSURE (bar)	Setting (bar)	HEX 1	ØB	L
Z FPR 1/4	1/4" BSP	12	350	0,5	19	7	50
Z VSR 1/4	1/4" BSP	12	350	0,5	19	7	50
Z VSR 1/4-2.5	1/4" BSP	12	350	2,5	19	7	50
Z VSR 1/4-5	1/4" BSP	12	350	5	19	7	50
Z VSR 1/4-10	1/4" BSP	12	350	10	19	7	50
Z VSR 3/8	3/8" BSP	30	350	0,5	24	10	60
Z VSR 3/8-2.5	3/8" BSP	30	350	2,5	24	10	60
Z VSR 3/8-5	3/8" BSP	30	350	5	24	10	60
Z VSR 3/8-10	3/8" BSP	30	350	10	24	10	60
Z VSR 1/2	1/2" BSP	45	350	0,5	27	11	65
Z VSR 1/2-2.5	1/2" BSP	45	350	2,5	27	11	65
Z VSR 1/2-5	1/2" BSP	45	350	5	27	11	65
Z VSR 1/2-10	1/2" BSP	45	350	10	27	11	65
Z VSR 3/4	3/4" BSP	90	300	0,5	34	17	75
Z VSR 1	1" BSP	140	250	0,5	41	19	90
Z VSR 1 1/4	1" 1/4 BSP	180	250	0,5	50	29	110
Z VSR 1 1/2	1" 1/2 BSP	300	250	0,5	55	34	112
Z FPR 2	2" BSP	430	200	0,5	75	48	120

-20°C / 180°C