


## Metric Bonded Seal in FKM Self-centering

1/1

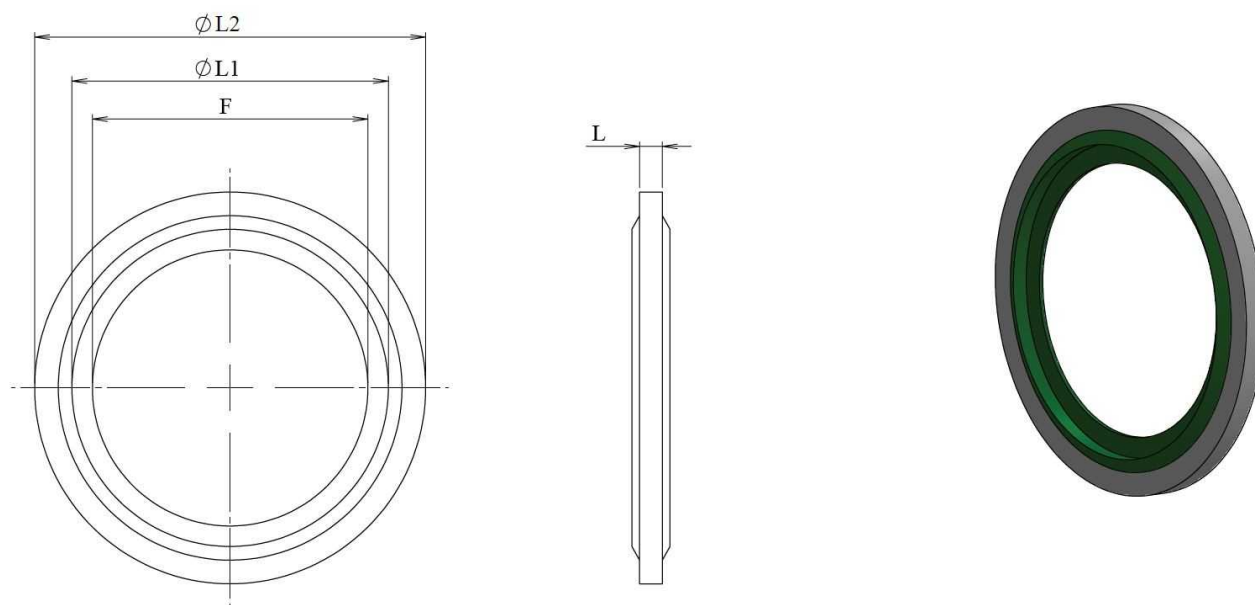

**Materials** Metal washer: stainless steel SUS 316L  
Oring: FKM 75 +/-5 Sh A

**Working temperature** From -10°C to +200°C

| Part n°         | R1      | Burst pressure (bar) | L   | L1   | L2 | F     |
|-----------------|---------|----------------------|-----|------|----|-------|
| <b>ZVT32006</b> | M6X1    | 1.130                | 1   | 6,7  | 10 | 4.7   |
| <b>ZVT32008</b> | M8X1    | 1.550                | 1   | 8,7  | 14 | 6.4   |
| <b>ZVT32010</b> | M10X1   | 1.350                | 1,5 | 10,7 | 16 | 8.05  |
| <b>ZVT32012</b> | M12X1,5 | 1.250                | 1,5 | 12,7 | 18 | 9.73  |
| <b>ZVT32014</b> | M14X1,5 | 1.510                | 1,5 | 14,7 | 22 | 11.38 |
| <b>ZVT32016</b> | M16X1,5 | 1.400                | 1,5 | 16,7 | 24 | 13.41 |
| <b>ZVT32018</b> | M18X1,5 | 1.275                | 1,5 | 18,7 | 26 | 14.76 |
| <b>ZVT32020</b> | M20X1,5 | 1.150                | 1,5 | 20,7 | 28 | 16.76 |
| <b>ZVT32022</b> | M22X1,5 | 1.100                | 2   | 22,7 | 30 | 18.74 |
| <b>ZVT32024</b> | M24X1.5 | 1.050                | 2   | 24,7 | 32 | 20.11 |
| <b>ZVT32026</b> | M26X1.5 | 1.050                | 2   | 26,7 | 35 | 22.30 |
| <b>ZVT32027</b> | M27X1,5 | 1.130                | 2   | 27,2 | 36 | 23.30 |
| <b>ZVT32030</b> | M30X2   | 860                  | 2   | 31   | 39 | 25.70 |
| <b>ZVT32036</b> | M36X2   | 880                  | 2   | 36,7 | 46 | 31.10 |
| <b>ZVT32042</b> | M42X2   | 940                  | 3   | 42,7 | 53 | 36.50 |