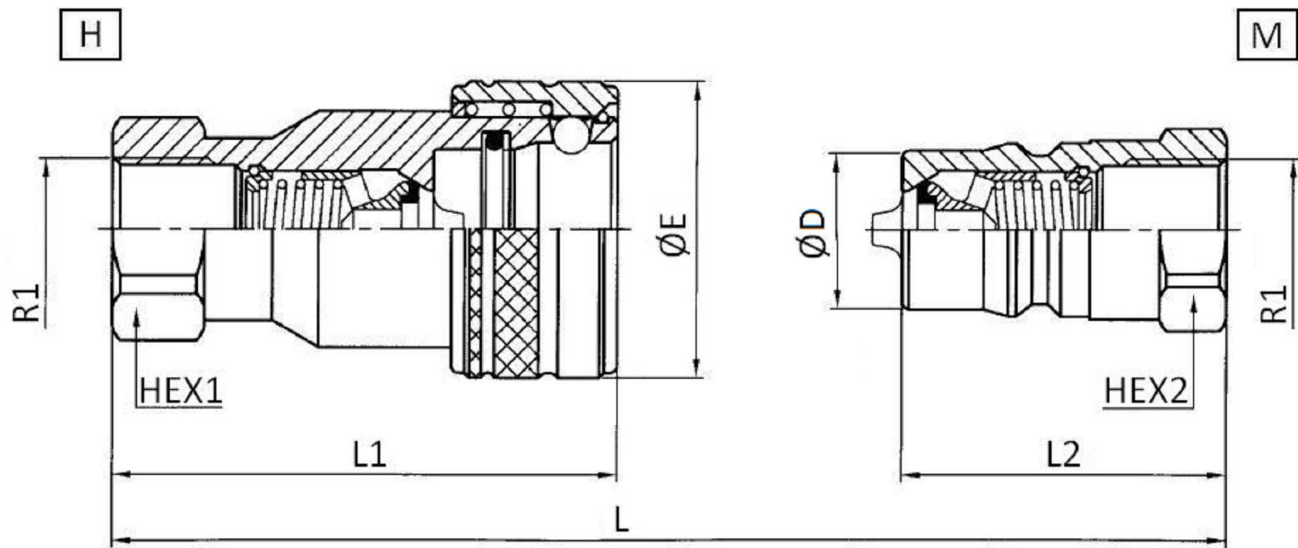


Quick coupling ISO 7241-B

Stainless Steel AISI 316

1/1**Material:** Stainless Steel AISI 316**Seals:** FKM and PTFE**Working temperature:** -25°C / +200°C**Working pressure:** 90-300 bar

Part n°	R1	Working Pressure (bar)	ISO size	BG size	Coupling	L	L1	L2	HEX 1	HEX 2	ØD	ØE	FLOW (l/min)
Z800104	1/4" BSP	300	6,3	1	M	76,5		38		19	14,2		16
Z800106	3/8" BSP	250	10	2	M	81,5		40,5		22	19,1		30
Z800108	1/2" BSP	250	12,5	3	M	92,5		46		27	23,55		41
Z800112	3/4" BSP	250	20	4	M	114,5		57		34	31,45		92
Z800116	1" BSP	200	25	5	M	128		63,5		41	37,6		113
Z800120	1"1/4 BSP	140	40	7	M	201,5		127		65	44,45		500
Z800124	1"1/2 BSP	140	40	7	M	201,5		127		65	44,45		500
Z800132	2" BSP	90	50	8	M	220		142		90	63,2		940
Z800204	1/4" BSP	300	6,3	1	H	76,5	60		19		-	28	16
Z800206	3/8" BSP	250	10	2	H	81,5	65,2		22		-	35	30
Z800208	1/2" BSP	250	12,5	3	H	92,5	73,7		27		-	44	41
Z800212	3/4" BSP	250	20	4	H	114,5	91,5		34		-	51,5	92
Z800216	1" BSP	200	25	5	H	128	103,8		41		-	60	113
Z800220	1"1/4 BSP	140	40	7	H	201,5	126,5		65		-	78,5	500
Z800224	1"1/2 BSP	140	40	7	H	201,5	126,5		65		-	78,5	500
Z800232	2" BSP	90	50	8	H	220	142		90		-	106	940