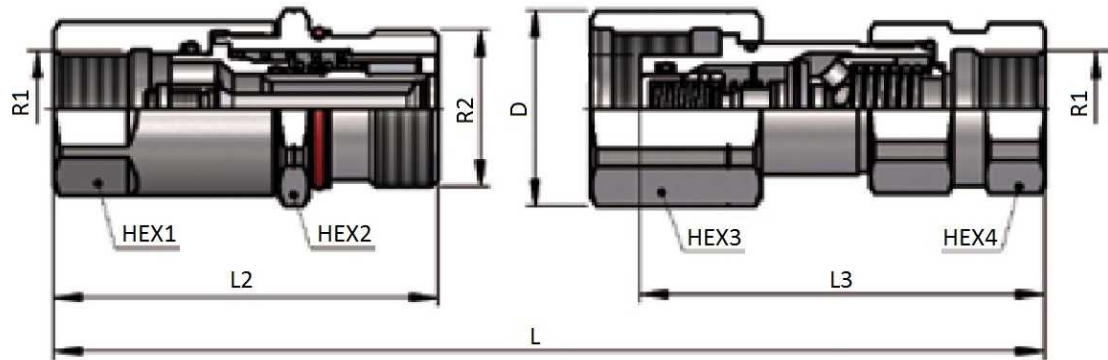


Flat face screw couplings, connection u/pressure

Stainless Steel AISI 316-L

1/1

Part n°	R1	R2	ISO size	BG size	Coupling	MAX. PRESSURE (bar)	L	L2	L3	HEX 1	HEX 2	HEX 3	HEX 4	ØD
Z905106	3/8" BSP	M30x2	10	2	M	250	132,8	73,5	-	27	34	-	-	-
Z905108	1/2" BSP	M36x2	12,5	3	M	250	153,2	83,5	-	36	41	-	-	-
Z905112	3/4" BSP	M36x2	16	4A	M	250	159,7	86	-	36	41	-	-	-
Z905116	1" BSP	M43x3	19	4	M	250	178	97,5	-	41	46	-	-	-
Z905120	1"1/4 BSP	M48x3	25	5	M	250	209,5	109,3	-	50	55	-	-	-
Z905124	1"1/2 BSP	M80x4	40	7	M	150	244	119,5	-	70	90	-	-	-
Z905206	3/8" BSP	M30X2	10	2	H	250	132,8	-	75	-	-	36	30	40
Z905208	1/2" BSP	M36X2	12,5	3	H	250	153,2	-	87	-	-	41	36	45
Z905212	3/4" BSP	M36X2	16	4A	H	250	159,7	-	91	-	-	41	36	45
Z905216	1" BSP	M43X3	19	4	H	250	178	-	102	-	-	50	41	55
Z905220	1"1/4 BSP	M48X3	25	5	H	250	209,5	-	122	-	-	55	55	60
Z905224	1"1/2 BSP	M80X4	40	7	H	150	153,6	-	244	-	-	75	-	99,5