Abrasive hose 40 bar MI030540035

Documentation publisher / supplier: DICSA

Manufacturer part number / published order designation: MI030540035

Published model: MI030540035

About this compilation

Prepared by Hydmaster from selected manufacturer documentation. Original technical pages follow without cropped drawings, rewritten data or altered units. This cover and index are Hydmaster editorial material, not a manufacturer-issued exact-execution datasheet.

Coverage: selected pages relevant to the identified size and configuration. Other options or neighbouring models retained on an original page apply only where explicitly identified.

Execution notes and conditions

The excerpt preserves the currently linked technical catalogue edition; differently coded newer product-card variants are not treated as equivalent.

Rows and illustrations for other sizes retained on the same original page are not assigned to this article.

Source-page index

Source page numbers below are physical pages of each complete original PDF. The original printed page labels and technical content remain unchanged. Compiled page numbers count this cover/index.

Source A: DICSA Hydraulic Hoses - Technical Catalogue

Original pages	Compiled pages	Relevant content
145	2	Exact MI030540035 row with the family construction, application, composition, size and stated pressure/temperature/geometry conditions.

Abrasiva impulsión 40 bar

Abrasive hose 40 bar
Tuyau abrasif 40 bar

INDUS TrAle®

-35°C → +80°C

2,5 : 1

COMPOSICIÓN · COMPOSITION · COMPOSITION

NR/SBR/BR liso negro antiestático // Antistatic NR/ SBR/NP, black, smooth// NR/ SBR/NP antistatique lisse noir

// **Mallas textiles enrolladas** // Textile wrapped braids// Tresses textiles enroulées

// **SBR antiestático negro** // Antistatic SBR, black // SBR antistatique noir

	mm	mm	bar	psi	bar	psi	mm	kg/m
*	19	31	40	580	100	1450	190	0,6
MI030540025	25	37	40	580	100	1450	220	0,75
*	25	39	40	580	100	1450	250	0,8
MI030540032	32	46	40	580	100	1450	320	1,10
MI030540035	35	49	40	580	100	1450	350	1,15
*	35	50	40	580	100	1450	350	1,20
MI030540038	38	54	40	580	100	1450	380	1,40
*	38	58	40	580	100	1450	380	1,90
*	40	55	40	580	100	1450	350	1,35
MI030540050	50	66	40	580	100	1450	500	1,70
*	50	68	40	580	100	1450	500	1,95
*	50	70	40	580	100	1450	500	2,20
MI030540065	65	83	40	580	100	1450	650	2,55
MI030540076	76	98	40	580	100	1450	760	3,62
MI030540102	102	125	40	580	100	1450	1020	5,07
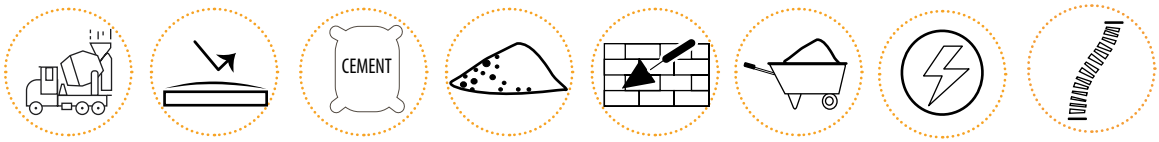
// ***Bajo consulta** // On request // Sur demande