

Hydrocarbons hose 10 bar discharge MI04011010

Documentation publisher / supplier: DICSA

Manufacturer part number / published order designation: MI04011010

Published model: MI04011010

About this compilation

Prepared by Hydmaster from selected manufacturer documentation. Original technical pages follow without cropped drawings, rewritten data or altered units. This cover and index are Hydmaster editorial material, not a manufacturer-issued exact-execution datasheet.

Coverage: selected pages relevant to the identified size and configuration. Other options or neighbouring models retained on an original page apply only where explicitly identified.

Execution notes and conditions

The excerpt preserves the currently linked technical catalogue edition; differently coded newer product-card variants are not treated as equivalent.

Rows and illustrations for other sizes retained on the same original page are not assigned to this article.

Source-page index


Source page numbers below are physical pages of each complete original PDF. The original printed page labels and technical content remain unchanged. Compiled page numbers count this cover/index.

Source A: DICSA Hydraulic Hoses - Technical Catalogue

Original pages	Compiled pages	Relevant content
132	2	Exact MI04011010 row with the family construction, application, composition, size and stated pressure/temperature/geometry conditions.

Hidrocarburos 10 bar impulsión

Hydrocarbons 10 bar discharge
Hidrocarburos 10 bar impulsión

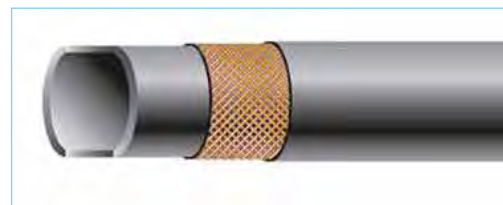

-40°C → +80°C



3 : 1

INDUS TrAle®

COMPOSICIÓN • COMPOSITION • COMPOSITION



// **Caucho sintético antiestático negro liso** // Synthetic rubber antistatic, black, smooth // Caoutchouc synthétique antistatique noir lisse



1

// **Malla Textil en espiral** // Spiral Textile Braid // Tresse Textile en spirale



// **Caucho sintético liso negro antiestático** // Synthetic rubber, antistatic, black, smooth// Caoutchouc synthétique antistatique, lisse, noir



	mm	mm	bar	psi	bar	psi	mm	kg/m
MI04011006	6	12	10	150	30	450	40	0,11
MI04011008	8	14	10	150	30	450	50	0,15
MI04011010	10	17	10	150	30	450	60	0,17
MI04011013	13	20	10	150	30	450	80	0,23
MI04011016	16	23	10	150	30	450	100	0,28
*	16	24	10	150	30	450	100	0,31
MI04011019	19	27	10	150	30	450	120	0,37
*	19	28	10	150	30	450	120	0,45
MI04011025	25	35	10	150	30	450	150	0,61
MI04011032	32	42	10	150	30	450	190	0,76

// *Bajo consulta // On request // Sur demande

