Hydrocarbons hose 20 bar discharge MI04042032

Documentation publisher / supplier: DICSA

Manufacturer part number / published order designation: MI04042032

Published model: MI04042032

About this compilation

Prepared by Hydmaster from selected manufacturer documentation. Original technical pages follow without cropped drawings, rewritten data or altered units. This cover and index are Hydmaster editorial material, not a manufacturer-issued exact-execution datasheet.

Coverage: selected pages relevant to the identified size and configuration. Other options or neighbouring models retained on an original page apply only where explicitly identified.

Execution notes and conditions

The excerpt preserves the currently linked technical catalogue edition; differently coded newer product-card variants are not treated as equivalent.

Rows and illustrations for other sizes retained on the same original page are not assigned to this article.

Source-page index

Source page numbers below are physical pages of each complete original PDF. The original printed page labels and technical content remain unchanged. Compiled page numbers count this cover/index.

Source A: DICSA Hydraulic Hoses - Technical Catalogue

Original pages	Compiled pages	Relevant content
133	2	Exact MI04042032 row with the family construction, application, composition, size and stated pressure/temperature/geometry conditions.

Hidrocarburos 20 bar impulsión

Hydrocarbons 20 bar discharge
Hydrocarbures 20 bar impulsion

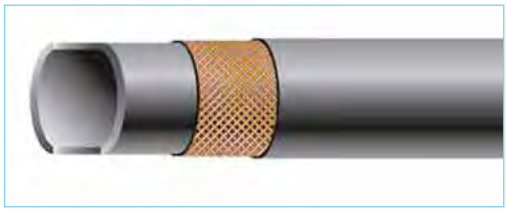

INDUS TrAle®

-40°C → + 100°C

3 : 1

COMPOSICIÓN · COMPOSITION · COMPOSITION

// **Caucho sintético antiestático negro liso** // Synthetic rubber antistatic, black ,smooth // Caoutchouc synthétique antistatique noir lisse

1 // **Malla Textil en espiral** // Spiral Textile Braid // Tresse Textile en spiral

// **Caucho sintético liso antiestático** // Synthetic rubber, antistatic, smooth, black // Caoutchouc synthétique antistatique, lisse, noir

	mm	mm	bar	psi	bar	psi	mm	kg/m
MI04042006	6	12	20	290	60	870	40	0,15
MI04042008	8	15	20	290	60	870	50	0,20
MI04042010	10	17	20	290	60	870	60	0,22
MI04042013	13	20	20	290	60	870	80	0,30
MI04042016	16	24	20	290	60	870	100	0,40
MI04042019	19	28	20	290	60	870	120	0,50
MI04042025	25	35	20	290	60	870	150	0,73
MI04042032	32	42	20	290	60	870	190	0,75
*	38	50	20	290	60	870	230	1,10
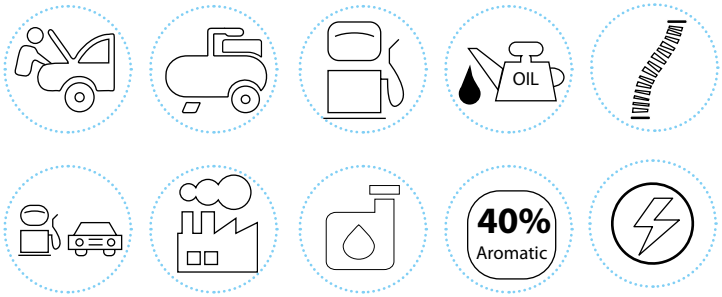
// ***Bajo consulta** // On request // Sur demande