Multi-function. Continuous serie MM2025

Documentation publisher / supplier: DICSA

Manufacturer part number / published order designation: MM2025

Published model: MM2025

About this compilation

Prepared by Hydmaster from selected manufacturer documentation. Original technical pages follow without cropped drawings, rewritten data or altered units. This cover and index are Hydmaster editorial material, not a manufacturer-issued exact-execution datasheet.

Coverage: selected pages relevant to the identified size and configuration. Other options or neighbouring models retained on an original page apply only where explicitly identified.

Execution notes and conditions

The excerpt preserves the currently linked technical catalogue edition; differently coded newer product-card variants are not treated as equivalent.

Rows and illustrations for other sizes retained on the same original page are not assigned to this article.

Source-page index

Source page numbers below are physical pages of each complete original PDF. The original printed page labels and technical content remain unchanged. Compiled page numbers count this cover/index.

Source A: DICSA Hydraulic Hoses - Technical Catalogue

Original pages	Compiled pages	Relevant content
126	2	Exact MM2025 row with the family construction, application, composition, size and stated pressure/temperature/geometry conditions.

Polivalente serie continua

Multi-function. Continuous serie
Tuyau polyvalent huiles/ eau

INDUS TrAle®

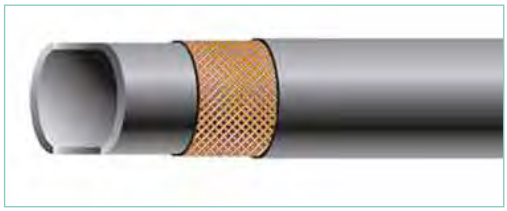

-40°C → +95°C

<+100 °C

3 : 1

COMPOSICIÓN · COMPOSITION · COMPOSITION

// **EPDM liso antiestático** // EPDM, smooth, antistatic // EPDM lisse antistatique

1 // **Malla textil en espiral** // Spiral textile braid // Tresse textile en spiral

// **EPDM liso antiestático** // EPDM, smooth, antistatic // EPDM, lisse, antistatique

	mm	mm	bar	psi	bar	psi	mm	kg/m
*	6	13	20	290	60	870	40	0,15
MM2008	8	15	20	290	60	870	50	0,19
MM2010	10	17	20	290	60	870	60	0,22
MM2013	13	21	20	290	60	870	80	0,34
MM2016	16	24	20	290	60	870	120	0,33
MM2019	19	27	20	290	60	870	120	0,46
MM2025	25	34	20	290	60	870	150	0,67
MM2032	32	44	20	300	60	900	200	1,15
MM2038	38	50	20	300	60	600	250	2,40
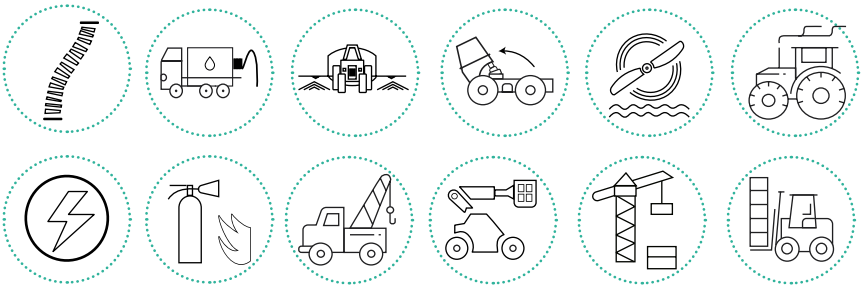
// ***Bajo consulta** // On request // Sur demande